

INSTALLATION INSTRUCTIONS FOR EMERGENCY LIGHTING

Package Contents

Part	Description	Quantity
1	Emergency Lighting	1
2	Pictogram pack	1



Warnings and Cautions

IMPORTANT SAFEGUARDS

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. Review the diagrams thoroughly before beginning.
2. All electrical connections must be in accordance with local codes, ordinances and the National Electric code.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Do not use outdoors.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surface.
7. Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel.
8. The use of accessory equipment not recommend by the manufacturer may cause an unsafe condition.
9. Do not use this equipment for other than intended use.
10. All servicing should be performed by qualified personnel only.
11. Allow battery to charge for 16 hours before first use.

SAVE THESE INSTRUCTIONS

Mounting Instructions

NOTE: First turn off electricity.

1.Remove mounting fixture from fixture with a screwdriver.

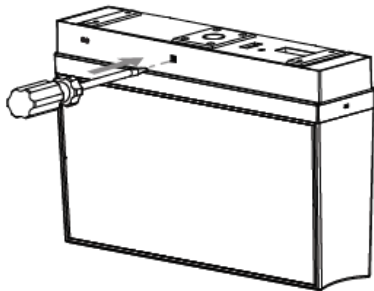


Fig 1

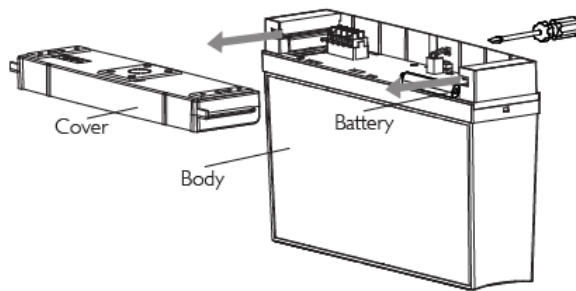


Fig 2

2.Make proper wire connections.

TERMINAL BLOCK

Wiring schematic for the terminal block used with the Mercury Basic.




Fig 3

3.Securely attach mounting plate to the wall or ceiling with M4 screws. Connect the battery to PCB, slide fixture into the mounting plate.

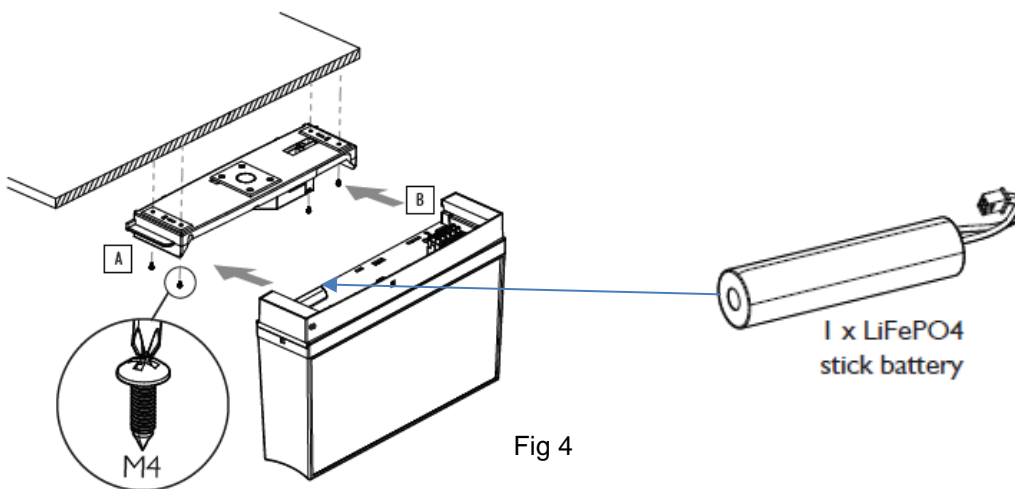


Fig 4

4.Restore power and battery powered LED will come on. Press test button, AC light will turn off and LED keep on.

5.REPLACING THE BATTERY

Access the battery by removing the product cover. Disconnect and remove battery.

Replace battery as was previously installed. Battery can be connected in one direction only, do not force.